



Filling aircraft on-board O₂ cylinders for commercial, military and private fleets. Transferring O₂ into various high pressure receivers for deep ocean diving support, commercial or military. These are just two examples of the uses for **Model 26968** oxygen boosters that have provided cost savings and increased safety for many years.

This model will pump from high or medium pressure sources and will also function effectively to collect and transfer the gas from partially depleted supply cylinders to "top off" other cylinders to maximum pressure. Conventional industrial, shipboard or contractor type compressed air sources are normally used for power. All motive power and controls are completely pneumatic with no electrical connections required.

The basic booster is two-stage, rated for continuous duty compression ratios of over 15:1, intermittent to 40:1.


A pneumatic control package continually monitors both inlet cylinder pressure and outlet receiver pressure, stopping the booster automatically when desired outlet or minimum inlet pressure is reached, permitting unattended operation.

FEATURES

- Drive is a low friction, slow speed cycling air cylinder, designed for continuous duty without airline lubrication. Vented distance pieces insure hydrocarbon-free gas section operation. High pressure oxygen seals are wear compensating, immune to sudden failure and operate completely non-lube, oil free.
- Very cold air (as low as -20° F) is a natural by-product from the air powered drive exhaust.



**32" long x 14" wide x 24" high
Approx. weight: 115 lbs.**

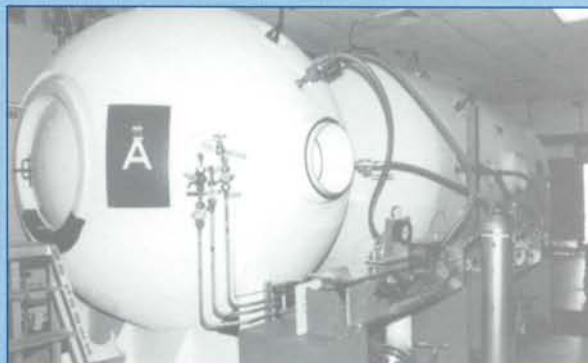


**Hyperbaric Chambers Used
for Experimental Diving.**

This frigid exhaust air is channeled through a system of cooling jackets and interstage cooler, resulting in high pressure cylinder temperatures well below limits needed for long life of critical parts.

- Inlet gas supply pressure acts directly through the opposed piston construction to assist the air drive during the compression stroke, conserving power required by the drive in direct proportion to the gas supply pressure.

TYPICAL APPLICATION

BASIC SCHEMATIC HASKEL OXYGEN BOOSTER UNIT MODEL 26968

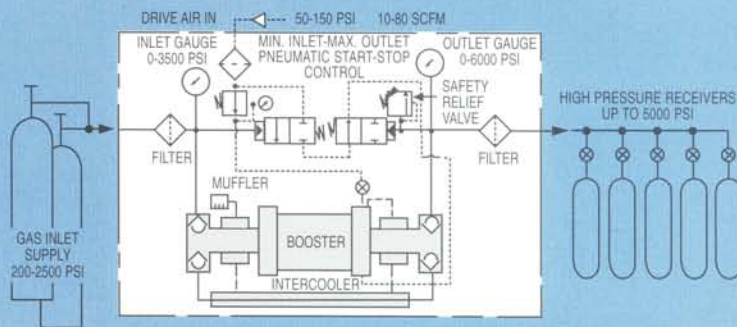

SPECIFICATIONS

- **Booster:** Air driven, balanced opposed piston type, two stage.
- **High pressure Oxygen Chambers:** Non-lube, hydrocarbon-free, triple sealed and vented from the drive air chest.
- **High Pressure Tubing & Fittings:** Stainless steel, 5,000 psi maximum oxygen working pressure.
- **Air Drive Section:** No oiling required, corrosion resistant factory lubed at assembly, 150 psi max. drive pressure.
- **Particle Filters:** Inlet and outlet gas: 5 micron. All stainless steel.
- **Gauges:** Stainless steel tube, solid front 4-1/2" dial size.
- **Port Sizes:** Inlet and outlet gas: $\frac{1}{2}$ " NPT female; Air Drive: $\frac{1}{2}$ " NPT female.
- **Control Range Adjustment:**
Inlet minimum: 150 to 850 psi cutout
Outlet maximum: 800 to 5,000 psi cutout
Safety relief (outlet): 800 to 5,000 psi
- **Cooling:** With air exhaust to both stages and intercooler.
- **Noise:** 80 db range pulses, depending on working pressure (measured at 30 inches from booster).
- **Maintenance:** Simple seal kit replacement.
- **Installation:** No special foundation, no tie down required, and no electrical connections.

PERFORMANCE

EXAMPLES OF PERFORMANCE WITH AIR DRIVE POWER OF 50 SCFM (C) AIR FLOW AT AIR DRIVE PRESSURE INDICATED				
OXYGEN GAS PRESSURE — PSI		OXYGEN OUTLET GAS FLOW — SCFM		
INLET	OUTLET (B)	Air Drive PSI		
		60	80	100
250	1500	3.5	4.0	4.0
250	2000	2.1	3.6	3.6
250	3000	(A)	(A)	2.5
1000	1500	8.7	14.7	15.0
1000	2500	(B)	9.7	13.7
1000	3500	(B)	9.6	13.6
1500	2000	(B)	14.7	20.7
1500	2500	(B)	(B)	16.1
1500	3000	(B)	(B)	(B)
2000	2500	(B)	(B)	21.6

- (A) Outlet stall (maximum gas outlet pressure is: Air Drive psi x 30 plus 2x gas inlet psi).
- (B) Interstage stall (maximum gas inlet pressure is air drive psi x 15 if outlet exceeds air drive psi x 30. If it does not, maximum gas inlet is air drive psi x 30).
- (C) If less air flow is available, outlet gas rates will decrease about in proportion.



Haskel International, Inc.

100 East Graham Place
Burbank, California 91502 • USA
Telephone: (818) 843-4000
Fax: (818) 556-2549 or (818) 841-4291
www.haskel.com

中国代理商:
上海兆帕流体动力有限公司
www.mpapower.com
Tel: 021-5843 0335



1 on
our
el.com



Haskel Energy Systems Ltd.

North Hylton Road
Sunderland SR5 3JD • England • UK
Tel: 44-191-549-1212 • Fax: 44-191-549-0911

Haskel (Asia) Pte. Ltd.

23 Tagore Lane #03-07
Tagore 23 Warehouse Complex
Singapore 787601
Tel: 65-6455-7559 • Fax: 65-6455-2841
www.haskel.com.sg

Haskel Australasia Pty. Ltd.

P.O. Box 267
Salisbury, Qld. 4107 • Australia
Tel: 61-7-3277-9118 • Fax: 61-7-3277-6129
www.haskel.com.au

Haskel HochdruckSysteme GmbH

D-46485 Wesel
Fritz-Haber Strasse • Germany
Tel: 49-281-98-48-00 • Fax: 49-281-98-48-020
www.haskel.de

Haskel-General Pneumatic

4 rue du haut de la Cruppe
F-59650 Villeneuve d'Ascq • France
Tel: 33-320-04 66 00 • Fax: 33-320-33 31 95

Haskel Benelux B.V.

Cobaltstraat 28
2718 RN Zoetermeer • Netherlands
Tel: 31-79-361 84 72 • Fax: 31-79-360 05 60

Haskel España S.R.L.

Paseo Ubarburu 81 • Edif. 5 • 1ª Planta
Locales 1 y 2 • Pol. 27 Martutene
20115 Astigarraga • Gipuzkoa • Spain
Tel: 34-943-47 45 66 • Fax: 34-943-45 11 86
www.haskel-es.com

Haskel Energy Systems Limited

Unit 14, Airways Industrial Estate,
Pitmedden Road
Dyce, Aberdeen AB21 ODT • Scotland
Tel: 01224-771784 • Fax: 01224-723642

Haskel Italiana S.R.L.

via Carabelli 28
21041 Albizzate • Varese • Italy
Tel: 39-331-987596 • Fax: 39-331-987597
www.haskel.it